

Lightbits Software Defined Storage on Supermicro SuperServers

Lightbits' software-defined (SDS), disaggregated and high-performance storage can be deployed on Supermicro SuperServers over standard ethernet networks using TCP/IP protocol, requiring zero modification to applications.

While software-defined storage is desirable for its ability to lower cost by utilizing standard servers and components, a "do it yourself" approach is not for everyone.

For the ultimate in scalability, performance and convenience, this ready-to-deploy solution delivers composable NVMe® over TCP-based block storage with built-in Intelligent Flash Management™ that increases flash endurance by 20X. It's an ideal platform for applications running on-premises, in private and edge clouds in containerized or virtual environments.

DEPLOYING WITH CONFIDENCE

Lightbits offers rich data services such as flexible cluster size and configuration, high availability and data protection, management and monitoring, data services including thin provisioning, QoS, encryption, compression and others.

A Lightbits cluster consisting of four 1U SuperServers SSG-121E-NE316R with 3-replicas redundancy enabled can serve up to 17.8 Million IOPS of 4K random reads and up to 3.9 Million IOPS of random writes, up to 135.5GB/s of read bandwidth and up to 33GB/s of write bandwidth.

LIGHTBITS ON A SUPERMICRO SUPERSERVER

Unmodified Software on Clients

- Standard NVMeoF w/multipathing (ANA)
- Clients can connect to multiple clusters

Clustered/Failover Storage Solution

- Distributed cluster management with fast failover and no single point of failure
- Cluster size: 3-16 servers
- 64K Volumes per cluster

Lightbits Cluster Performance with 2x Replication

- up to 72 Million 4K Random Read IOPS
- up to 24 Million 4K Random Write IOPS
- up to 541 GB/s Read Bandwidth
- up to 198 GB/s Write Bandwidth

Lightbits Cluster Capacity (15.36TB drives)

- 4.68PB Effective Capacity (2x replication, Elastic RAID, 2:1 compression)

Lightbits Cluster Latency with 2x Replication


- 160µs average latency 4K Random Read @1.27M IOPS per server
- 493µs average latency 4K Random Write @433K IOPS per server

Lightbits Storage Services

- QoS
- Thin provisioning
- Compression
- Elastic RAID for drive failure protection
- Volume replication (1x, 2x or 3x) per volume

Lightbits Node Management


- Replication and failover handling
- Failure handling using NVMe/TCP multipath
- Non-disruptive cluster upgrades (for 2x and 3x replicated volumes)

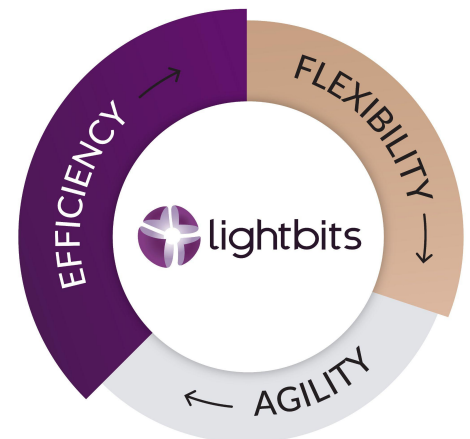

Lightbits SDS platform with Intelligent Flash Management enables efficiency, simplicity and agility for the modern datacenter



SUPERSERVER LIGHTBITS CLUSTER TOPOLOGY

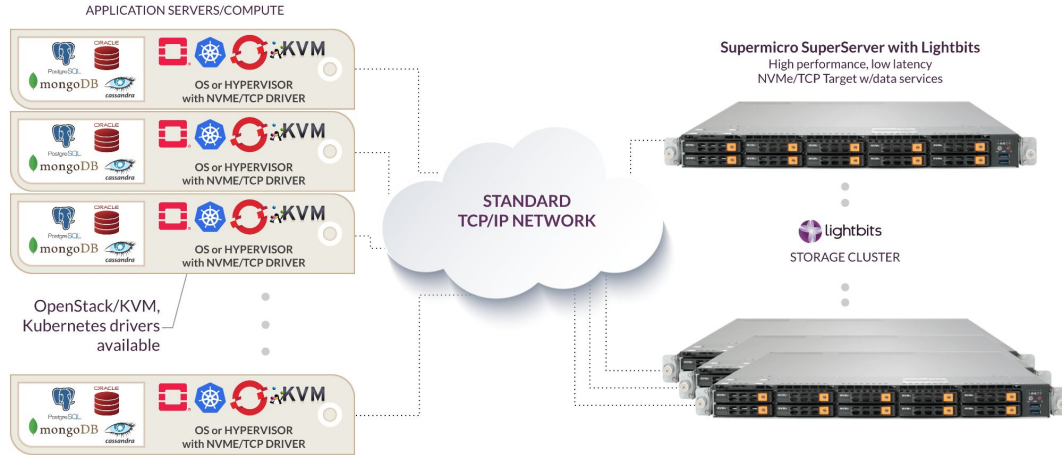


Cloud Native Applications deployment utilizing a Supermicro SuperServer with Lightbits NVMe/TCP storage targets

SUPERMICRO AND LIGHTBITS BENEFITS



Composable:
Simple Scaling and
Deployments



Fast Application
Deployment and
Load Balancing



Improved
Utilization
and TCO

SUPERMICRO AND LIGHTBITS APPLICATIONS



Visual Effects
and Video
Processing



Latency and
Performance Sensitive
Databases



Latency Sensitive
High Transaction
Workloads



Cloud
Services IaaS,
PaaS, SaaS



	Basic Density	Basic Capacity	Performance & Capacity	Density	Density & Capacity
Server SKU	SYS-221BT-HNR	SSG-121E-NE316R		SYS-221BT-DNTR	
Form Factor	2U 4Node	1U 1Node		2U 2Node	
Raw Capacity Per node/per chassis	92/368 TB	122 ~ 245 TB	492 TB	184/368 TB	245/490 TB
CPU Per node/per chassis	Intel SPR 6438Y 2/8	Intel SPR 6438Y 2	Intel SPR 6438Y 2	Intel SPR 6438Y 2/4	Intel SPR 6438Y 2/4
Memory Per node/per chassis	32GB DDR5 16/64	32GB DDR5 16	32GB DDR5 16~32	32GB DDR5 16/32	64GB DDR5 16/32
NVMe Drives Per node/per chassis	15.36TB 6/24	15.36TB 8~16	30.72TB 16	15.36TB 12/24	30.72TB 12/24
Networking Per node/per chassis	2p 200GbE 1/4	2p 200GbE 1	2p 200GbE 2	2p 200GbE 1/2	2p 200GbE 1/2
Lightbits Instances per node	1	1	2	1	1
Performance Per node	4K R: 2614K IOPS 4K W: 1710K IOPS 128K R: 20 GB/s 128K W: 15 GB/s	4K R: 2679K IOPS 4K W: 1649K IOPS 128K R: 20 GB/s 128K W: 14 GB/s	4K R: 4461K IOPS 4K W: 2935K IOPS 128K R: 34 GB/s 128K W: 25 GB/s	4K R: 2614K IOPS 4K W: 1710K IOPS 128K R: 20 GB/s 128K W: 15 GB/s	4K R: 2614K IOPS 4K W: 1710K IOPS 128K R: 20 GB/s 128K W: 15 GB/s
Performance Per chassis	4K R: 10456K IOPS 4K W: 6840K IOPS 128K R: 80 GB/s 128K W: 60 GB/s	4K R: 2679K IOPS 4K W: 1649K IOPS 128K R: 20 GB/s 128K W: 14 GB/s	4K R: 4461K IOPS 4K W: 2935K IOPS 128K R: 34 GB/s 128K W: 25 GB/s	4K R: 5228K IOPS 4K W: 3420K IOPS 128K R: 40 GB/s 128K W: 30 GB/s	4K R: 5228K IOPS 4K W: 3420K IOPS 128K R: 40 GB/s 128K W: 30 GB/s

*A Lightbits cluster requires a minimum of 3 nodes.

To learn more, please visit our website, www.lightbitlabs.com To contact our team, email us at info@lightbitlabs.com

1830 The Alameda, San Jose, CA 95126 E: info@lightbitlabs.com www.lightbitlabs.com

©2024 All rights reserved. Lightbits Labs, Lightbits, Lightbits Super SSD, Light Up Your Cloud, Lightedge, Intelligent Flash Management, the Lightbits Labs logo are trademarks of Lightbits Labs, Inc., and its affiliates in the United States and/or other countries. Other trademarks are the property of their respective companies. References in this publication to Lightbits products, programs, or services do not imply that Lightbits Labs intends to make these available in all countries in which it operates. Product specifications provided are sample specifications and do not constitute a warranty. Information is true as of the date of publication and is subject to change. Actual specifications for unique part numbers may vary.